



32 bar -20/100°C		SUCTION ACCUMULATOR ACUMULADORES DE ASPIRACIÓN									HFC	R410A			
Kg	Modelo	Code Código	Vol (L)	Conex.	Ø mm	H mm	L mm	Ø holes support Ø mm taladros soporte	Evap. Temp (°C)	Recommended capacities Capacidades Recomendadas.KW					
										R 134 A		R 404 A / R 507 / R410A			
										Máx	Mín	Máx	Mín		
CAT. II	16.3	DAL-150A-2 1/8"	1027	15	2 1/8"	219	542	354	11	-7	70,6	12,2	133,8	17,4	
										-28,9	26,5	8,7	56,1	12,1	
	19.3	DAL-200A-2 1/8"	1028	20	2 1/8"	273	490	300	13	-7	113	19,2	203,8	28	
										-28,9	42	12,1	88,1	21	
	20	DAL-210A-2 5/8"	1029	20	2 5/8"	273	490	300	13	-7	215	29,6	203,8	28	
										-28,9	98,4	22,7	88,1	21	
CAT. III	27	DAL-340A-2 5/8"	1033	35	2 5/8"	273	705	495	13	-7	324	45,4	307,2	43,4	
										-28,9	141	33,2	124,7	29,4	
	28.2	DAL-350A-3 1/8"	1031	35	3 1/8"	273	708	500	13	-7	196	32,1	307,2	43,4	
										-28,9	84,4	22,8	124,7	29,4	
	30	DAL-350Y-3 5/8"	0.1032	35	3 5/8"	273	762	480	13	-7	196	32,1	307,2	43,4	
										-28,9	84,4	22,8	124,7	29,4	
	44	DAL-500A-4 1/8"	1034	50	4 1/8"	323	758	522	13	-7	257	88,2	502,7	112,8	
										-28,9	105	58,6	200,7	35,2	
CAT. IV	79	DAL-1000A-4 1/8"	1035	100	4 1/8"	323	1300	1077	13	-7	259	88,6	502,6	112,4	
										-28,9	107	59,4	200,3	45,8	



32 bar -20/100°C		SUCTION ACCUMULATOR ACUMULADORES DE ASPIRACIÓN									HFC	R410A			
Kg	Modelo	Code Código	Vol (L)	Conex.	Ø mm	B mm	H mm	E mm	Safety	Evap. Temp. Evap. (°C)	Recommended capacities Capacidades Recomendadas.KW				
											R 134 A		R 404 A / R 507 R410A		
											Máx	Mín	Máx	Mín	
CAT. II	18	BT-180-A	12012	18	2 1/8"	219	225	660	114	3/8" NPT	-7	112	18,7	202	27,9
											-28,9	44	11,9	87,7	20,9
CAT. III	35	BT-360-A	12013	36	2 5/8"	323	350	637	170	3/8" NPT	-7	324	45,4	307,2	43,4
											-28,9	141	33,2	124,7	29,4
	36	BT-360-B	27003	36	3 1/8"	323	350	637	170	3/8" NPT	-7	324	45,4	307,2	43,4
											-28,9	141	33,2	124,7	29,4
	45	BT-500-A	27004	50	3 1/8"	323	350	809	170	3/8" NPT	-7	257	88,2	502,7	112,8
											-28,9	105	58,6	200,7	35,2
	58	BT-700-A	27005	70	3 5/8"	323	350	1065	170	3/8" NPT	-7	258	88,4	502,7	112,6
											-28,9	105,5	59	200,6	41
CAT. IV	96	BT-1150-A	27006	115	4 1/8"	508	510	845	280	3/8" NPT	-7	259,5	88,7	502,6	112,3
											-28,9	107,2	59,7	200,3	46

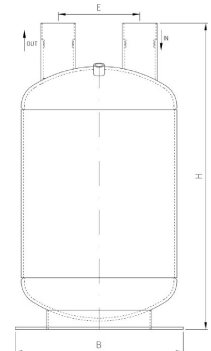

ORDER / PEDIDO



TO INCLUDE THE SAFETY VALVE YOU MUST INDICATE IN YOUR ORDER:
PARA INCLUIR LA VÁL. SEGURIDAD, INDICAR EN EL PEDIDO:

MODEL / V.SG

EXAMPLE: BT-500-A / V.SG

VALID FOR ALL THE REFRIGERANTS HFC: R22, R134a, R404A, R507,ETC
VÁLIDO PARA TODOS LOS REFRIGERANTES HFC: R22, R134a, R404A, R507,ETC

ALL THE MODELS ARE PAINTED IN BLACK
TODOS LOS MODELOS SON PINTADOS EN NEGRO

