


DAL-CO₂



BT-CO₂

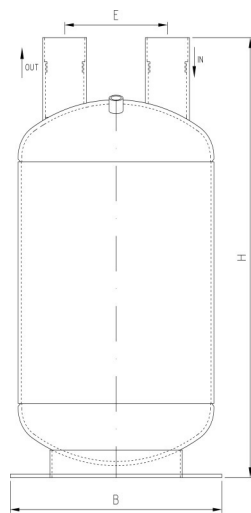

	Kg	Model Modelo	Code Código	Vol (L)	Conex Inch.	Ø mm	L (mm)	H (mm)	E (mm)	Screw Tornillo
30bar -10/80°C 20bar -40/80°C										
CAT. I	6	DAL-018A - CO ₂	0.1053	4	1 1/8"	159	246	286	90	M10
	7	DAL-019A - CO ₂	0.1054	5	1 1/8"	159	304	344	90	M10
CAT. II	8	DAL-021A - CO ₂	0.1055	7,1	1 3/8"	159	423	461	90	M10
	9.5	DAL-022A - CO ₂	0.1056	9	1 3/8"	159	523	561	90	M10
	11	DAL-023B - CO ₂	0.1057	12	1 5/8"	159	688	726	90	M10

	Kg	Model Modelo	Code Código	Vol (L)	Conex.	Ø (mm)	B (mm)	T (mm)	H (mm)	E (mm)
30 bar -40/100°C										
CAT. II	22	BT-180A - CO ₂	12.143	18	2 1/8"	219,1	225	200	660	114
CAT. III	39	BT-360A - CO ₂	12.145	36	2 1/8"	323,9	350	290	635	170
	40	BT-360B - CO ₂	12.146	36	3 1/8"	323,9	350	290	635	170
	48	new BT-500A - CO ₂	12.1248	50	3 1/8"	323,9	350	290	809	170

ORDER / PEDIDO

OPTIONAL
SAFETY VALVE
VÁLVULA DE SEGURIDAD

TO INCLUDE THE SAFETY VALVE ON MODELS "BT" YOU MUST INDICATE IN YOUR ORDER:
 PARA INCLUIR LA VÁL. SEGURIDAD EN LOS MODELOS "BT", INDICAR EN EL PEDIDO:

MODEL / V.SG

EXAMPLE: BT-180-A-CO₂ / V.SG

OPTIONAL / OPCIONAL:
SPECIAL PAINTING FOR CO₂
PINTURA ESPECIAL PARA CO₂
 400 µm
 (recomended / recomendada)

ALL THE MODELS ARE PAINTED IN BLACK
 TODOS LOS MODELOS SON PINTADOS EN NEGRO

