


20 bar -40/80°C 28 bar -20/100°C		SUCTION ACCUMULATOR WITH HEAT EXCHANGER ACUMULADOR DE LIQUIDO CON INTERCAMBIADOR											HFC		R410A	
	Kg	Model Modelo	Code Código	Vol (L)	Conex.	Exchange Conex. Interc.	Ø (mm)	L (mm)	H (mm)	E (mm)	Screw Tornillo	Evap. Temp. (°C)	Recommended capacities Capac-			
													R 134 A		R 404 A R507/R410A	
													Máx	Mín	Máx	Mín
CAT. 0	2.2	DALH-011-A	31,001	1,5	5/8"	3/8"	101	236	266	45	M8	4,4 -28,9	5,2 2,1	0,7 0,3	5,2 4,1	0,7 0,5
	2.2	DALH-011-F	31,002	1,5	3/4"	3/8"	101	236	266	45	M8	4,4 -28,9	5,1 2,1	0,7 0,3	5,2 4,1	0,7 0,5
CAT. I	5.2	DALH-017-A	31,003	4	7/8"	1/2"	127	388	428	80	M8	4,4	12,6	0,9	14,7	1,2
	7.2	DALH-021-B	31,004	7,1	1 1/8"	5/8"	159	423	461	90	M10	4,4	21,4	1,4	24,2	1,2
CAT. II	8.8	DALH-022-A	31,005	9	1 3/8"	3/4"	159	523	561	90	M10	4,4 -28,9	27,3 11,2	1,34 0,7	30,8 21,4	1,2 0,9
	8.8	DALH-022-B	31,006	9	1 5/8"	3/4"	159	523	561	90	M10	4,4 -28,9	27,3 11,2	1,34 0,7	30,8 21,4	1,2 0,9

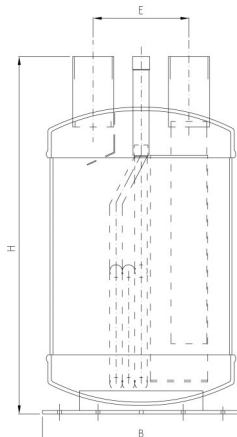

32 bar -20/100°C		SUCTION ACCUMULATOR WITH HEAT EXCHANGER ACUMULADOR DE LIQUIDO CON INTERCAMBIADOR											HFC		R410A	
	Kg	Model Modelo	Code Código	Vol (L)	Conex.	Exchange Conex. Interc.	Ø (mm)	B (mm)	T (mm)	H (mm)	E (mm)	Evap Temp Evap. (°C)	Recommended capacities Capacidades Recomendadas KW			
													R 134 A		R 404 A / R 507 R410A	
													Máx	Mín	Máx	Mín
CAT. II	21	BTH-180-A	31,007	18	2 1/8"	7/8"	219	225	200	645	114	-7	112	18,7	202	27,9
												-28.9	44	11,9	87,7	20,9
CAT. III	36.6	BTH-360-A	31,008	36	2 5/8"	1 1/8"	323	350	290	635	170	-7	324	45,4	307,2	43,4
												-28.9	141	33,2	124,7	29,4
	52	BTH-500-A	31,009	50	3 1/8"	1 1/8"	323	350	290	809	170	-7	257	88,2	502,7	112,8
												-28.9	105	58,6	200,7	115,2

Steel connections / Conexiones de acero
Cooper heat exchanger / Intercambiador de cobre

VALID FOR ALL THE REFRIGERANTS HFC: R22, R134a, R404A, R507,ETC
VÁLIDO PARA TODOS LOS REFRIGERANTES HFC: R22, R134a, R404A, R507,ETC

ALL THE MODELS ARE PAINTED IN BLACK
TODOS LOS MODELOS SON PINTADOS EN NEGRO

