

LIQUID RECEIVERS FROM 1L TO 15L

RECIPIENTES DE LIQUIDO DE 1L HASTA 15L

A2L-A3

HFC



The liquid receivers ensure the compensation of the variations in the volume of the refrigerant gas in the installations, which are due to the differences in operating temperature in different seasons and to the opening and closing sequences of the expansion valve that fills or not the evaporator of your refrigerant gas


Allow the refrigerant gas of the installation to be stored, for maintenance or repair operations

Los depósitos de líquido aseguran la compensación de las variaciones de volumen del gas refrigerante en las instalaciones, las cuales son debidas a las diferencias de temperatura de funcionamiento en diferentes estaciones y a las secuencias de apertura y cierre de la válvula de expansión que llena o no el evaporador de su gas refrigerante

Permiten almacenar el gas refrigerante de la instalación, para las operaciones de mantenimiento o reparación

MAXIMUM WORKING PRESSURE: 32 bar

MAXIMA PRESIÓN DE TRABAJO: 32 bar

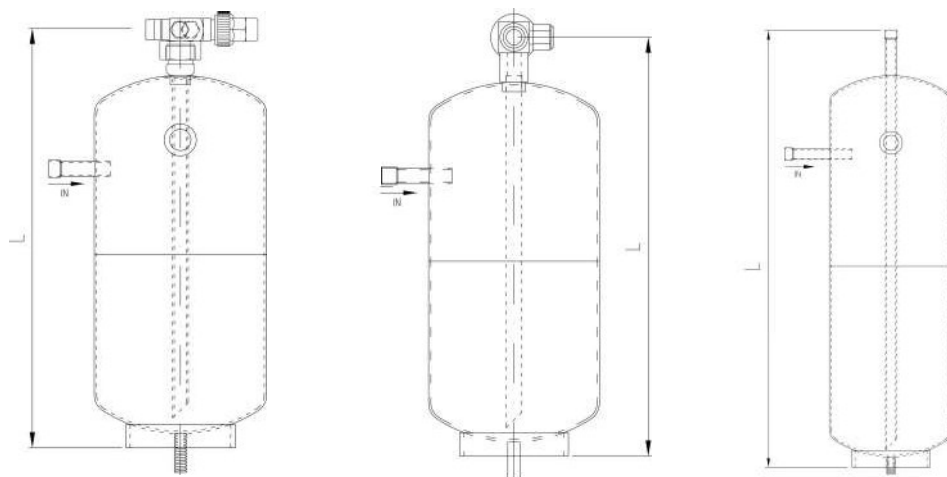

OPTIONAL / OPCIONAL

SAFETY VALVE
VÁL. SEGURIDAD



ACCORDING TO EACH MODEL
ACORDE A CADA MODELO

32 bar -10/80°C				VERTICAL LIQUID RECEIVER WITH ROTALOCK VALVE RECIPIENTE DE LÍQUIDO VERTICAL CON VÁLVULA ROTALOCK					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.SEGURIDAD
CAT-0	DVR-150-M	0.7011	1.1	1,2L	80	248	1/4" ODS	3/4" X 1/4" ODS	-
CAT. I	DVR-200-M	0.7012	1.6	2L	110	270	3/8" ODS	3/4" X 3/8" ODS	-
	DVR-300-M	0.7013	2.4	3L	110	397	1/2" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-500-M	0.7014	3.7	5L	150	340	1/2" ODS	1" X 1/2" ODS	1/4 NPT
CAT. II	DVR-700-M	0.7015	3.9	7L	150	475	1/2" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-1100-M	0.7016	5.3	11L	180	467	5/8" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-1500-M	0.7017	7.3	14L	180	632	7/8" ODS	1 1/4" X 7/8" ODS	1/4 NPT

32 bar -10/80°C				VERTICAL LIQUID RECEIVER WITH TOP SERVICE VALVE RECIPIENTE DE LÍQUIDO VERTICAL CON VÁLVULA DE SERVICIO SUPERIOR					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.SEGURIDAD
CAT. I	BV2	22.022	1.6	2L	110	269	3/8" ODS	3/8" ODS	-
	BV3	22.023	2.4	3L	110	379	3/8" ODS	1/2" ODS	-
	BV5	22.024	3.7	5L	150	336	1/2" ODS	1/2" ODS	-
CAT. II	BV7	22.037	3.9	7L	150	459	1/2" ODS	1/2" ODS	3/8" NPT
	BV11	22.025	5.3	11L	180	464	1/2" ODS	1/2" ODS	3/8" NPT
	BV15	22.026	7.3	14L	180	604	7/8" ODS	5/8" ODS	3/8" NPT

32 bar -10/80°C				VERTICAL LIQUID RECEIVER WITH COPPER CONNECTIONS RECIPIENTE DE LÍQUIDO VERTICAL CON CONEXIONES DE COBRE					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.SEGURIDAD
CAT-0	DVC-150-A	0.6001	1.1	1,2L	80	250	3/8 ODS	3/8 ODS	-
CAT. I	DVC-200-A	0.6002	1.6	2L	110	270	3/8 ODS	3/8 ODS	-
	DVC-300-A	0.6003	2.4	3L	110	390	3/8 ODS	3/8 ODS	1/4 NPT
	DVC-500-A	0.6004	3.2	5L	150	348	1/2" ODS	1/2" ODS	1/4 NPT
CAT. II	DVC-700-A	0.6005	4	7L	150	468	1/2" ODS	1/2" ODS	1/4 NPT
	DVC-1100-A	0.6006	5.2	11L	180	480	3/4" ODS	3/4" ODS	1/4 NPT
	DVC-1500-A	0.6007	7	14L	180	620	3/4" ODS	3/4" ODS	1/4 NPT

NOTE:
* TOLERANCE ± 3%



LIQUID RECEIVERS FROM 1L TO 15L

RECIPIENTES DE LIQUIDO DE 1L HASTA 15L

A2L-A3

CO₂

HFC



The liquid receivers ensure the compensation of the variations in the volume of the refrigerant gas in the installations, which are due to the differences in operating temperature in different seasons and to the opening and closing sequences of the expansion valve that fills or not the evaporator of your refrigerant gas




Allow the refrigerant gas of the installation to be stored, for maintenance or repair operations

Los depósitos de líquido aseguran la compensación de las variaciones de volumen del gas refrigerante en las instalaciones, las cuales son debidas a las diferencias de temperatura de funcionamiento en diferentes estaciones y a las secuencias de apertura y cierre de la válvula de expansión que llena o no el evaporador de su gas refrigerante

Permiten almacenar el gas refrigerante de la instalación, para las operaciones de mantenimiento o reparación

MAXIMUM WORKING PRESSURE: 45 bar

MAXIMA PRESIÓN DE TRABAJO: 45 bar

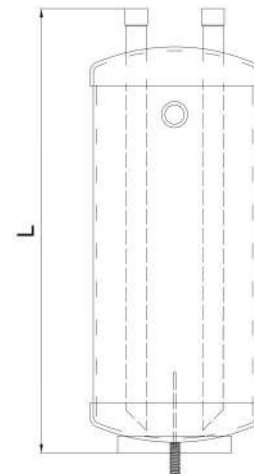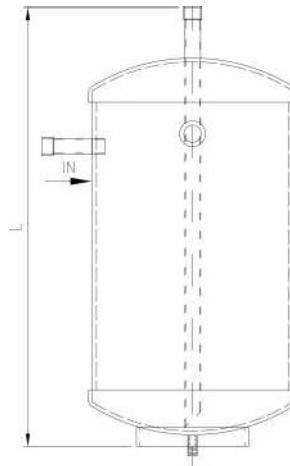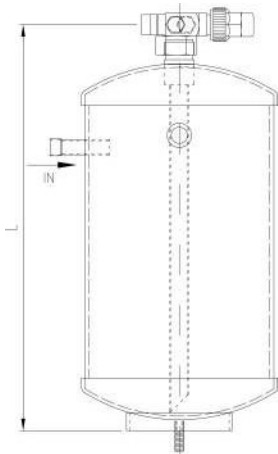

OPTIONAL / OPCIONAL


SAFETY VALVE
VÁL. SEGURIDAD



ACCORDING TO EACH MODEL
ACORDE A CADA MODELO

45 bar -10/80°C 20bar -40/80°C				VERTICAL LIQUID RECEIVER WITH ROTALOCK VALVE RECIPIENTE DE LÍQUIDO VERTICAL CON VÁLVULA ROTALOCK					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.SEGURIDAD
CAT-0	DVR-150-M/42bar	0.7020	2.8	1,2L	80	248	1/4" ODS	3/4" X 1/4" ODS	-
CAT. I	DVR-200-M/45bar	0.7021	3	2L	127	270	3/8" ODS	3/4" X 3/8" ODS	-
	DVR-300-M/45bar	0.7022	5	3L	127	397	1/2" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-500-M/45bar	0.7023	6	5L	159	340	1/2" ODS	1" X 1/2" ODS	1/4 NPT
CAT. II	DVR-700-M/45bar	0.7024	8	7L	159	475	1/2" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-1100-M/45bar	0.7025	12	11L	193	467	5/8" ODS	1" X 1/2" ODS	1/4 NPT
	DVR-1500-M/45bar	0.7026	14	14L	193	632	7/8" ODS	1 1/4" X 7/8" ODS	1/4 NPT

45 bar -10/80°C 20bar -40/80°C				VERTICAL LIQUID RECEIVER WITH COPPER CONNECTIONS RECIPIENTE DE LÍQUIDO VERTICAL CON CONEXIONES DE COBRE					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.V.SEGURIDAD
CAT-0	DVC-150-A/42bar	0.6016	2.5	1,2L	80	250	3/8 ODS	3/8 ODS	-
CAT. I	DVC-200-A/45bar	0.6013	3	2L	127	270	3/8 ODS	3/8 ODS	-
	DVC-300-A/45bar	0.6017	6	3L	127	390	3/8 ODS	3/8 ODS	1/4 NPT
	DVC-500-A/45bar	0.6012	7	5L	159	348	1/2" ODS	1/2" ODS	1/4 NPT
CAT. II	DVC-700-A/45bar	0.6009	8	7L	159	468	1/2" ODS	1/2" ODS	1/4 NPT
	DVC-1100-A/45bar	0.6010	12	11L	193	480	3/4" ODS	3/4" ODS	1/4 NPT
	DVC-1500-A/45bar	0.6011	13	14L	193	620	3/4" ODS	3/4" ODS	1/4 NPT

 45 bar -10/80°C				VERTICAL LIQUID RECEIVER WITH COPPER CONNECTIONS RECIPIENTE DE LÍQUIDO VERTICAL CON CONEXIONES DE COBRE					
	Model Modelo	Code Código	Kg	Vol (L)	Ø (mm)	L* (mm)	IN inch	OUT inch	SAFETY VALVE VÁL.V.SEGURIDAD
CAT-0	DVY-0.75/42bar	113.001	2	0,75L	80	190	1/2" ODS	1/2" ODS	-
	DVY-1.5/42bar	113.002	2.6	1.5L	80	250	1/2" ODS	1/2" ODS	1/4 NPT
CAT. I	DVY-2/45bar	113.003	3.3	2L	127	248	5/8" ODS	5/8" ODS	1/4 NPT
	DVY-3/45bar	113.004	4.8	3L	127	348	5/8" ODS	5/8" ODS	1/4 NPT
	DVY-5/45bar	113.005	6.4	5L	159	340	5/8" ODS	5/8" ODS	1/4 NPT
CAT. II	DVY-7/45bar	113.006	10	7L	159	440	5/8" ODS	5/8" ODS	1/4 NPT
	DVY-11/45bar	113.007	12	11L	219	390	7/8" ODS	7/8" ODS	1/4 NPT
	DVY15/45bar	113.008	16	15L	219	521	7/8" ODS	7/8" ODS	1/4 NPT

NOTE:

* TOLERANCE ± 3%